



2325 Lakeview Pkwy,  
Ste 450, Alpharetta, GA,  
30009 USA

[gcpat.com](http://gcpat.com)

**John Dalton**  
Technical Service Manager  
+1 617 498 4935 Office  
+1 781 258 6463 Mobile  
[John.a.dalton@gcpat.com](mailto:John.a.dalton@gcpat.com)

**LEED RELATED DOCUMENTS**  
**MONOKOTE® MK-6/HY and**  
**MONOKOTE® MK-6 Extended Set**

LEED Letter	Page 2
Environmental Product Declaration	Page 4
Declare Label	Page 21
Volatile Organic Compounds (VOCs) Content Report	Page 23
Volatile Organic Compounds (VOCs) Emissions Report	Page 25



2325 Lakeview Pkwy,  
Ste 450, Alpharetta, GA,  
30009 USA

gcpat.com

**John Dalton**  
Technical Service Manager  
+1 617 498 4935 Office  
+1 781 258 6463 Mobile  
John.a.dalton@gcpat.com

March 10, 2020

RE: Monokote® Fireproofing Materials and sustainability.

GCP Applied Technologies is proud to participate in a number of sustainability programs that can help you design and construct a more sustainable building.

**Contribution to LEED**

Monokote® Fireproofing materials are shipped in recyclable packaging and contain recycled content. We also have publicly available transparency reports to provide insight into our products. Choosing Monokote® Fireproofing can potentially help projects achieve the following LEED® 2009 and LEED® v4 credits under the Building Design + Construction and Interior Design + Construction rating systems:

LEED® 2009	
Construction Waste Management	Regional Materials
Recycled Content	Acoustic Environment (Healthcare)
Low-Emitting Materials—Paints and Coatings	Enhanced Acoustical Performance (Schools)
LEED® v4	
Building Product Disclosure and Optimization—Material Ingredients	Building Product Disclosure and Optimization—Environmental Product Declarations
Low Emitting Materials	Acoustic Performance
Building Product Disclosure and Optimization—Sourcing of Raw Materials	Construction and Demolition Waste Management

**Environmental Product Declaration:**

All Monokote® Fireproofing materials have a Type III environmental product declaration prepared in accordance with ISO 14025, ISO 21930, ISO 14040/44, ASTM Product Category Rule (PCR) for Spray-applied Fire-Resistive Materials (SFRM) and ASTM General Program Instructions for Type III EPDs.

**Regional Materials:** Depending on your project location, you may also be eligible to claim a 100-mile regional sourcing multiplier for LEED® V4. Monokote® Fireproofing materials are produced in the following cities in North America:

Ajax, Ontario, Canada  
Santa Ana, California

Irondale, Alabama  
Andover, Massachusetts (Firebond Concentrate only)

**Contribution to the Living Building Challenge**

GCP Applied Technologies has developed Declare **RED LIST FREE** labels for several Monokote® Fireproofing products, all of which are available on the [Declare website](#).

**VOC – Content and Emissions ;** The majority of Monokote® Fireproofing products have been tested per the CDPH - **CA Section 01350** Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources using Environmental Chambers Version 1.2.

The **VOC** Content of our Monokote® Fireproofing products are as follows:

<u>Monokote® Product</u>	<u>Volatile Organic Compounds (VOC) reported per the Emission Standards</u>
Monokote® Fireproofing	0 g/L
Firebond® Concentrate	0.60 g/L

The **recycled contents** of Monokote® Fireproofing are shown below:

<u>Monokote</u>	<u>% Weight</u> <u>Post-Consumer</u>	<u>% Weight</u> <u>Post- Industrial</u>
MK-6/HY	7.13	0.00
MK-6s	5.13	0.00
MK-6 ES	5.13	0.00
MK-6/GF	7.05	0.00
RG	8.27	0.00
MK-10/HB	6.99	0.00
MK-10/HB ES	5.01	0.00
MK-1000/HB	5.10	0.00
MK-1000/HB ES	5.09	0.00
Z-106s	1.44	0.00
Z-106/HY	5.05	0.00
Z-106G	5.13	0.00
Z-146	1.93	0.00
Z-3306	4.51	0.00
SK-III	0.00	0.00
Z-146PC	1.91	0.00
Z-146T	1.91	0.00
Z-156	1.25	0.00
Z-156PC	1.23	0.00
Z-156T	1.23	0.00
Firebond Concentrate	0.00	0.00
MK Accelerator	0.00	0.00

All of the claims made by GCP Applied Technologies with respect to the claims made above have been verified by independent 3<sup>rd</sup> parties.

Please feel free to contact me or any member of the Monokote® Fireproofing team should you require a project specific letter, additional information or clarification. Additionally a project specific letter may be obtained [here](#).

We look forward to Monokote® Fireproofing being your product of choice when sustainability is important to you.

Sincerely,



John Dalton  
Technical Service Manager  
Fire Protection Products  
GCP Applied Technologies



2325 Lakeview Pkwy,  
Ste 450, Alpharetta, GA,  
30009 USA

[gcpat.com](http://gcpat.com)

**John Dalton**  
Technical Service Manager  
+1 617 498 4935 Office  
+1 781 258 6463 Mobile  
[John.a.dalton@gcpat.com](mailto:John.a.dalton@gcpat.com)

## Environmental Product Declaration



# An Environmental Product Declaration

According to ISO 14025:2006 and ISO 21930:2017

## A Corporate Average Cradle-to-gate EPD for Standard, Medium and High & Ultra High-Density Spray-applied Fire- Resistive Materials (SFRMs)

This EPD has been prepared in conformance with ISO 14025, 14040, 14044 standards and according to the requirements of ISO 21930:2017 and ASTM International's EPD program operator rules. This EPD was commissioned by the GCP Applied Technologies and is verified by ASTM International to conform to the requirements of ISO 14040, 14044, 14025 and 21930.



ASTM International  
West Conshohocken, PA  
[www.astm.org](http://www.astm.org)

Date of issue: 04.15.2022  
Period of validity: 5 years  
Declaration #: EPD 060



## Environmental Product Declaration Summary

### General Summary

#### Owner of the EPD



**GCP Applied Technologies Inc. (GCPAT)**  
2325 Lakeview Parkway Suite 450,  
Alpharetta, GA 30009 U.S.A.  
Link (URL): <https://gcpat.com>

With roughly 2,000 employees and 50 manufacturing facilities worldwide, GCP Applied Technologies serves customers in more than 100 countries.

GCPAT was formed in February 2016 by the spin-off of W. R. Grace & Co.'s construction products segment and its packaging technologies business.

The owner of the declaration is liable for the underlying information and evidence.

#### SFRM Manufacturing Facilities

**Ajax, Canada**  
294 Clements Rd. West  
Ajax, Ontario L1S 3C6

**Irondale, United States**  
2601 Commerce Blvd.  
Irondale, Alabama 35210

**Santa Ana, United States**  
2500 & 2502 S. Garnsey Street  
Santa Ana, California 92707

#### Product Group and Name

Spray-applied Fire-Resistive Material (SFRM),  
UN CPC 54650.

#### Product Description

SFRM is composed primarily of binding agents such as cement or gypsum and often contains other materials such as mineral wool, quartz, perlite, vermiculite, or bauxite along with various other ingredients

#### Reference Product Category Rules (PCR)

ISO 21930:2017 Sustainability in buildings and civil engineering works  
- Core rules for environmental product declarations of construction products and services.

#### Certification Period

04.15.2022 - 04.15.2027

#### Declared Unit

1,000 kg of SFRM

#### Declaration Number

EPD 060

ASTM International  
West Conshohocken, PA  
[www.astm.org](http://www.astm.org)

Date of issue: 04.15.2022  
Period of validity: 5 years  
Declaration #: EPD 060



**EPD and Project Report Information**

<b>Program Operator</b>	ASTM International
<b>Declaration Holder</b>	GCP Applied Technologies Inc.

**Declaration Type**

A “Cradle-to-gate” EPD (Production stage) of GCPAT’s production of standard, medium and high & ultra-high-density spray-applied fire-resistive material. The declaration presents a weighted average profile for all three North American facilities operated by GCP Applied Technologies Inc. that manufacture SFRMs. Product activities covered include the raw material supply, transport, and manufacturing (modules A1 to A3). The declaration is intended for Business-to-Business (B-to-B) communication.

**Applicable Countries**

United States and Canada

**Product Applicability**

SFRMs are used as part of a building’s passive fire resistance strategy. SFRMs have thermal and acoustical properties and assists in controlling condensation. However, its main use is in insulating steel, metal decking and other assemblies from the high temperatures found during a fire. SFRMs are used to delay (or prevent) the weakening of steel and the spalling of concrete in structures that are exposed to the high temperatures found during a fire. They do this by thermally insulating the structural members to keep them below the temperatures that cause failure.

**Content of the Declaration**

This declaration follows *Section 9; Content of an EPD*, ISO 21930:2017 Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products and services.

**This EPD was independently verified by ASTM in accordance with ISO 14025 and the core PCR ISO 21930:2017:**

<b>Internal</b>	<b>External</b>
	X

Tim Brooke, ASTM International

**The Project Report**  
*Note that the Project Report is not part of the public communication (ISO 21930, 10.1).*

A Cradle-to-Gate Life Cycle Assessment of GCP Applied Technologies Standard, Medium and High & Ultra High-Density Spray-applied Fire-Resistive Materials (SFRMs). April 2022.

**Prepared by**



**Athena Sustainable Materials Institute**

Lindita Bushi, PhD, Mr. Jamie Meil and Mr. Grant Finlayson  
 Athena Sustainable Materials Institute  
 280 Albert Street, Suite 404  
 Ottawa, Ontario, Canada K1P 5G8  
[info@athenasmi.org](mailto:info@athenasmi.org)  
[www.athenasmi.org](http://www.athenasmi.org)

**This EPD project report was independently verified by in accordance with ISO 14025, ISO 14040/44, and the core PCR ISO 21930:2017:**

Thomas P. Gloria, Ph. D.  
 Industrial Ecology Consultants

ASTM International  
 West Conshohocken, PA  
[www.astm.org](http://www.astm.org)

Date of issue: 04.15.2022  
 Period of validity: 5 years  
 Declaration #: EPD 060



# 1 PRODUCT IDENTIFICATION

## 1.1 PRODUCT DEFINITION

Spray-applied fire-resistive materials (UN CPC 54650) are composed primarily of binding agents such as cement or gypsum and often contain other materials such as quartz or bauxite along with various other ingredients. The other materials are used to help lighten the solution or to add air as an insulator. Chemical hardeners are sometimes used to either speed up hardening or to make the final fireproofing harder than the original.

Passive fire protection materials (commonly referred to as fireproofing) are used to prevent or delay the failure of steel and concrete structures exposed to fire. These materials are intended to insulate the structural members during the event of a fire, delaying any loss of the integrity of the structural members. There is an array of available fireproofing materials that can be used depending upon the specific application. Applied fireproofing is available as a wet or dry formula. It is typically sprayed but can also be troweled on. The fireproofing is generally delivered as a dry powder in bag, which is then mixed with water in the field. Modern formulas are asbestos-free and don't contain free crystalline silica. This is a company-specific EPD representing an array of available SFRMs produced at three of GCPAT's facilities located in North America and produced to various specifications as noted in Table 1. Table 1 summarizes key technical data for GCPAT SFRMs for the 2019 reference year (12 months). GCPAT SFRMs are classified in three major sub-categories based on the dry density minimum average values in pcf (pound per cubic foot). Full material selection guide and literature and the material safety data sheets are available for each of these fireproofing materials at <https://gcpat.com>.

**Table 1. Technical Data for GCPAT SFRMs**

Primary Binding Agent	GCPAT SFRM-Sub-category	Dry density, minimum average- in kg/m <sup>3</sup> (pcf)	GCPAT Brand Names
Gypsum - based	Standard density	240 (15)	MK Patch (GF Pail), MK-10/HB EXT SET WHITE, MK-10/HB EXT SET, MK-10/HB WHITE, MK-1000/HB, MK-1000/HB EXT SET, MK-10/HB, MK-10/HB EXT SET, MK-6 EXT SET, MK-6/GF, MK-6/HY, MK-6/HY EXT SET, MK-6/HY CE, MK-6/HY EXT SET, MK-6S, MK-6S CE, RG, Z-3306/G
Cement- or gypsum-based or a blend	Medium density	352 (22)	SK-3, Z-106/G, Z-106/HY, Z-3306, Z-3306 Gray, Z-3306 White
Cement- based	High & ultra-high density	640 (40)	Z-146, Z-146PC, Z-146T, Z-156, Z-156PC, Z-156T





## 1.2 PRODUCT STANDARD

The physical characteristics of SFRM are determined according to various ASTM standards such as, but not limited to:

- E736/E736M-19, Standard Test Method for Cohesion/Adhesion of Sprayed Fire- Resistive Materials Applied to Structural Members
- E605/E605M-19, Standard Test Methods for Thickness and Density of Sprayed Fire-Resistive Material Applied to Structural Members
- E759/E759M-92(2020)e1 Standard Test Method for Effect of Deflection on Sprayed Fire-Resistive Material Applied to Structural Members
- E760/E760M-92(2020)e1 Standard Test Method for Effect of Impact on Bonding of Sprayed Fire-Resistive Material Applied to Structural Members
- E761/E761M-92(2020)e1 Standard Test Method for Compressive Strength of Sprayed Fire-Resistive Material Applied to Structural Members
- E859/E859M-93(2020)e1 Standard Test Method for Air Erosion of Sprayed Fire-Resistive Materials (SFRMs) Applied to Structural Members
- E937/E937M-93(2020)e1 Standard Test Method for Corrosion of Steel by Sprayed Fire-Resistive Material (SFRM) Applied to Structural Members.

## 2 DECLARED UNIT

The declared unit is 1,000 kg, 1 metric ton) of spray-applied fire-resistive materials (SFRM).

## 3 MATERIAL CONTENT

Table 2 shows the weighted average generic formulations for all three sub-categories of GCPAT fireproofing materials as produced at GCPAT’s three manufacturing locations. For reasons of confidentiality a portion of each SFRM is reported as “additives”.

**Table 2: Weighted Average Generic Formulations for Standard, Medium, High & Ultra High Density SFRMs**

Standard Density		Medium Density		High & Ultra High Density	
Material composition	%	Material composition	%	Material composition	%
Stucco (CaSO4 ½H2O)	87%	Stucco (CaSO4 ½H2O)	54%	Bauxite	49%
Recovered paper	5%	Portland cement	31%	Portland cement	41%
Limestone	3%	Clay	6%	Clay	3%
Rest- additives	5%	Rest- additives	9%	Rest- additives	6%
Total	100%	Total	100%	Total	100%



Table 3 shows the amount of packaging materials per 1,000 kg of GCPAT SFRMs. Paper sacks are used for transporting fireproofing materials. The sacks are typically made of high-quality and weight kraft paper, usually virgin fiber.


**Table 3: Packaging Materials for GCPAT SFRMs**

Packaging materials	Quantity	Units (per 1,000 kg SFRM)
Paper Sacks	22.00	kg
Cardboard Core	0.30	kg

## 4 PRODUCTION STAGE

For this EPD, the boundary is “cradle-to-gate” or the *Production stage*, which includes the extraction of raw materials (cradle) through the manufacture of SFRM packaged ready for shipment (gate).

Downstream activity stages - Construction, Use, End-of-life, and Optional supplementary information beyond the system boundary - are excluded from the system boundary (Figure 1).

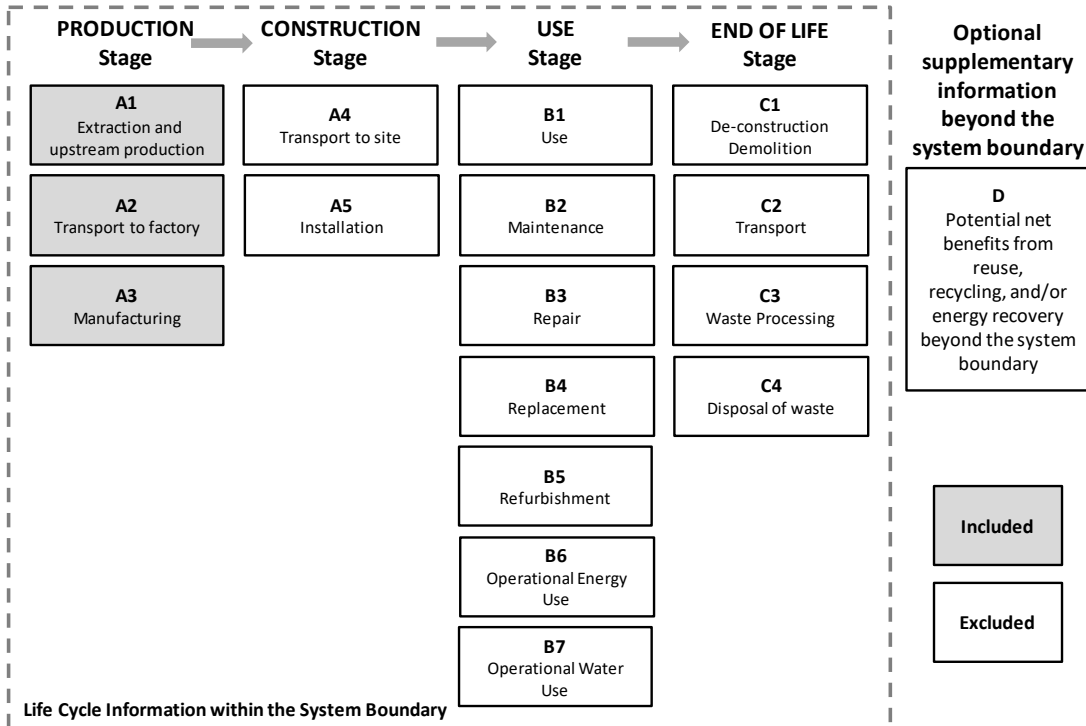

**Figure 1 Common four life cycle stages and their information modules for construction products and the optional supplementary module [2]**

The **Production stage** (modules A1 to A3) includes the following processes:

**A1 Extraction and upstream production:** Extraction and processing of input raw materials used in the production of standard, medium, high & ultra-high-density SFRMs, including fuels used in extraction and transport within the process.

**A2 Transportation to factory:** Transportation of input raw materials (including recovered materials) from extraction site or source to manufacturing facilities, including empty backhauls.

**A3 Manufacturing:** Manufacturing of the SFRMs, including all on-site energy and ancillary materials required and emissions to air, water and land and wastes produced. This also includes transportation from manufacturing site to landfill for on-site wastes, including empty backhauls and the waste disposal process. The A3 module includes grinding, mixing, blending, pneumatic conveying, high-speed auger packaging, lighting and heating, ventilation and air conditioning, operation of environmental equipment (baghouses and bin vents), on-site transportation (loading and unloading) and storage of SFRMs.



## 5 LIFE CYCLE INVENTORY

### 5.1 DATA COLLECTION, SOURCE AND CALCULATIONS

LCI data collection was based on a customized survey of all three GCPAT’s SFRM manufacturing sites. All facility specific LCI data were weighted based on facility level total annual production to calculate the weighted average LCI profile for each product type (per 1,000 kg). Data calculation procedures follow ISO 14044. Per ISO 21930, 7.2.2 the net calorific value (lower heating value) of fuels is applied according to scientifically based and accepted values specific to the combustible material.

### 5.2 DATA QUALITY REQUIREMENTS AND ASSESSMENTS

A detailed description of collected data and the data quality assessment regarding the core PCR requirements and ISO 14044 is provided in the LCA report. Data quality is assessed based on its representativeness (technology coverage, geographic coverage, time coverage), completeness, consistency, reproducibility, transparency, and uncertainty (Table 4).

**Table 4 Data Quality Requirements and Assessments**

Data Quality Requirements	Description
<b>Technology Coverage</b>	Data represents the prevailing company technology in use in U.S. and Canada. Whenever available, for all upstream and core material and processes, North American typical or average industry LCI datasets were utilized. <i>Technological representativeness is characterized as “high”.</i>
<b>Geographic Coverage</b>	The geographic region considered is U.S. and Canada. The geographic coverage of all LCI databases and datasets is given in in the LCA background report. <i>Geographical representativeness is characterized as “high”.</i>
<b>Time Coverage</b>	Activity data are representative as of 2019. - SFRM manufacturing process- primary data collected from 3 facilities: reference year 2019 (12 months); - In-bound/ out-bound transportation data- primary data collected from 3 facilities: reference year 2019 (12 months); - Generic data: the most appropriate LCI datasets were used as found in the US LCI Database, ecoinvent v.3.7.1 database, 2021. <i>Temporal representativeness is characterized as “high”.</i>
<b>Completeness</b>	All relevant, specific processes, including inputs (raw, secondary, ancillary, and packaging materials, and energy flows) and outputs (emissions and production volume) were considered and modeled to provide a weighted average for the SFRM products of interest. The relevant background materials and processes were taken from the US LCI Database, ecoinvent v 3.7.1 LCI database, and modeled in SimaPro v9.2.0.2, 2021. The completeness of the cradle-to-gate process chain in terms of process steps is rigorously assessed for SFRM products of interest and documented in the LCA background report.



Data Quality Requirements	Description
<b>Consistency</b>	To ensure consistency, the LCI modeling of the production weighted input and output LCI data for the SFRM product of interest used the same LCI modeling structure across the 3 facilities, which consisted of input raw, secondary, ancillary, and packaging materials, energy flows, water resource inputs, product outputs, co-products, by-products, emissions to air, water and soil, and solid and liquid waste disposal. Crosschecks concerning the plausibility of mass and energy flows were continuously conducted. The LCA team conducted mass and energy balances at the facility level and selected process levels to maintain a high level of consistency.
<b>Reproducibility</b>	Internal reproducibility is possible since the data and the models are stored and available in <i>GCPAT_SFRM_LCI database</i> developed in SimaPro, 2021. A high level of transparency is provided throughout the report as the weighted average LCI profile is presented for each of the declared products as well as major upstream inputs. Key primary (manufacturer specific) and secondary (generic) LCI data sources are summarized in Annex C. External reproducibility is also possible as a high level of transparency is provided throughout the Project Report and LCI data and sources are also summarized.
<b>Transparency</b>	Activity and LCI datasets are transparently disclosed in the project report, including data sources.
<b>Uncertainty</b>	A <i>sensitivity check</i> was conducted to assess the reliability of the EPD results and conclusions by determining how they are affected by uncertainties in the data or assumptions on calculation of LCIA and energy indicator results. The sensitivity check includes the results of the <i>sensitivity analysis</i> and <i>Monte Carlo uncertainty analysis</i> both of which are summarized in the LCA report.

### 5.3 ALLOCATION AND CUT-OFF RULES

“Mass” was deemed as the most appropriate physical parameter for allocation used for the SFRMs manufacturing system to calculate the input energy flows (electricity, natural gas, and propane), packaging materials and waste flows per declared unit of 1,000 kg of SFRM. LCI modeling accounts for the plant specific fabrication yields in accordance with ISO 14044, 4.3.4.2.

Secondary materials such as hammermilled newsprint and post-industrial polystyrene are considered recovered materials. However, only the materials, water, energy, emissions, and other elemental flows associated with reprocessing, handling, sorting, and transportation from the generating industrial process to their use in the production process are considered. Any allocated burdens before reprocessing are allocated to the original product. Allocation related to transport are based on the mass of transported product.

The cut-off criteria as per ISO 21930, were followed for this EPD. All input/output data required were collected and included in the LCI modelling. No substances with hazardous and toxic properties that pose a concern for human health and/or the environment were identified in the framework of this EPD. Any data gaps for the reference year 2019 - e.g., packaging materials were filled in with plant generic data from previous years.

ASTM International West Conshohocken, PA <a href="http://www.astm.org">www.astm.org</a>	Date of issue: 04.15.2022 Period of validity: 5 years Declaration #: EPD 060
---	--



---

The Production Stage *excludes* the following processes:

- Capital goods and infrastructure;
- Human activity and personnel related activity (travel, furniture, office operations and supplies);
- Energy and water use related to company management and sales activities that may be located either within the factory site or at another location.

## 6 LIFE CYCLE ASSESSMENT

### 6.1 RESULTS OF THE LIFE CYCLE ASSESSMENT

This section summarizes the product stage life cycle impact assessment (LCIA) results including resource use and waste generated metrics based on the cradle-to-gate life cycle inventory inputs and outputs analysis. Table 5 presents the calculated results for each product density based on 1,000 kg (1 metric ton). *It is noted that LCIA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks [2], [3].*



**Table 5 Production Stage (A1-A3), EPD Results for 1,000 kg standard, medium, high & ultra-high density SFRMs**

<b>Impact category and inventory indicators</b>	<b>Unit</b>	<b>Standard Density (min 15 pcf)</b>	<b>Medium Density (min 22 pcf)</b>	<b>High &amp; Ultra High Density (min 40 pcf)</b>
Global warming potential, GWP 100 <sup>1)</sup> , AR5	kg CO <sub>2</sub> eq	<b>210</b>	<b>493</b>	<b>621</b>
Ozone depletion potential, ODP <sup>1)</sup>	kg CFC-11 eq	<b>1.2E-04</b>	<b>1.3E-04</b>	<b>1.4E-04</b>
Smog formation potential, SFP <sup>1)</sup>	kg O <sub>3</sub> eq	<b>29.1</b>	<b>35.3</b>	<b>52.5</b>
Acidification potential, AP <sup>1)</sup>	kg SO <sub>2</sub> eq	<b>1.4</b>	<b>1.9</b>	<b>2.6</b>
Eutrophication potential, EP <sup>1)</sup>	kg N eq	<b>0.33</b>	<b>0.67</b>	<b>0.89</b>
ADP elements, CML <sup>2)</sup>	kg Sb eq	<b>1.0E-04</b>	<b>6.6E-04</b>	<b>1.8E-03</b>
ADP surplus, TRACI <sup>1)</sup>	MJ surplus	<b>515</b>	<b>607</b>	<b>683</b>
Renewable primary resources used as an energy carrier (fuel), RPR <sub>E</sub> <sup>3)</sup>	MJ LHV	<b>166.9</b>	<b>405.6</b>	<b>450.3</b>
Renewable primary resources with energy content used as material, RPR <sub>M</sub> <sup>3)</sup>	MJ LHV	<b>0</b>	<b>0</b>	<b>0</b>
Non-renewable primary resources used as an energy carrier (fuel), NRPR <sub>E</sub> <sup>3)</sup>	MJ LHV	<b>3,849</b>	<b>5,051</b>	<b>5,833</b>
Non-renewable primary resources with energy content used as material, NRPR <sub>M</sub> <sup>3)</sup>	MJ LHV	<b>0</b>	<b>0</b>	<b>0</b>
Secondary materials, SM <sup>3)</sup>	kg	<b>71</b>	<b>90</b>	<b>63</b>
Renewable secondary fuels, RSF <sup>3)</sup>	MJ LHV	<b>0.080</b>	<b>17</b>	<b>23</b>
Non-renewable secondary fuels, NRSF <sup>3)</sup>	MJ LHV	<b>0.77</b>	<b>167</b>	<b>218</b>
Recovered energy, RE <sup>3)</sup>	MJ LHV	<b>0</b>	<b>0</b>	<b>0</b>
Consumption of freshwater, FW <sup>3)</sup>	m <sup>3</sup>	<b>0.31</b>	<b>0.62</b>	<b>0.64</b>
Hazardous waste disposed, HWD <sup>3)</sup>	kg	<b>0.035</b>	<b>0.027</b>	<b>0.009</b>
Non-hazardous waste disposed, NHWD <sup>3)</sup>	kg	<b>19.9</b>	<b>116.0</b>	<b>143.5</b>
High-level radioactive waste, conditioned, to final repository, HLRW <sup>3)</sup>	m <sup>3</sup>	<b>9.8E-07</b>	<b>9.8E-07</b>	<b>1.0E-06</b>
Intermediate- and low-level radioactive waste, conditioned, to final repository, ILLRW <sup>3)</sup>	m <sup>3</sup>	<b>2.8E-06</b>	<b>3.3E-06</b>	<b>5.0E-06</b>
Components for re-use, CRU <sup>3)</sup>	kg	<b>0</b>	<b>0</b>	<b>0</b>
Materials for recycling, MR <sup>3)</sup>	kg	<b>0</b>	<b>0</b>	<b>0</b>
Materials for energy recovery, MER <sup>3)</sup>	kg	<b>0</b>	<b>0</b>	<b>0</b>
Recovered energy exported from the product system, EE <sup>3)</sup>	MJ LHV	<b>0.0029</b>	<b>0.62</b>	<b>0.81</b>
Global warming potential - biogenic, GWP-100 bio <sup>3)4)</sup>		1.1E-03	0.23	0.30
Emissions from calcination <sup>3)4)</sup>		0.71	152.3	200.0



Impact category and inventory indicators	Unit	Standard Density (min 15 pcf)	Medium Density (min 22 pcf)	High & Ultra High Density (min 40 pcf)
Emissions from combustion of waste from renewable sources <sup>3)4)</sup>		3.00E-04	0.064	0.085
Emissions from combustion of waste from non-renewable sources <sup>3)4)</sup>		0.072	15.5	20.3
Removals associated with biogenic carbon content of the bio-based product <sup>3)</sup>		-98.0	-66.2	-41.5
Removals associated with biogenic carbon content of the bio-based packaging <sup>3)</sup>		-40.9	-40.9	-40.9

Table Notes:

<sup>1)</sup> Calculated as per U.S EPA TRACI 2.1, v1.05, SimaPro v 9.2.0.2. GWP<sub>100</sub>, excludes biogenic CO<sub>2</sub> removals and emissions; 100-year time horizon GWP factors are provided by the IPCC 2013 Fifth Assessment Report (AR5), TRACI 2.1, with AR5, v1.05.

<sup>2)</sup> Calculated as per CML-IA Baseline V3.05, SimaPro v 9.2.0.2.

<sup>3)</sup> Calculated as per ACLCA ISO 21930 Guidance, respective sections 6.2 to 10.8.

<sup>4)</sup> Applicable for Portland cement only, used in manufacturing of the GCPAT SFRM [11].

## 6.2 INTERPRETATION

The cradle-to-gate manufacture of **standard density SFRM** embodies about 4 GJ of primary energy (LHV) and emits 210 kg CO<sub>2</sub> eq of greenhouse gases per ton of product. Around 96% of the total primary energy input is derived from non-renewable primary energy resources. Across the three standard density production information modules, Module A1 extraction and upstream production contributes the largest share of the LCIA and energy indicator results – accounting for between 60% (NRPR<sub>E</sub>) and 54% (GWP-100) of the potential environmental burdens. Module A3 Manufacturing is generally the second largest contributor to the overall potential environmental impacts – accounting for 32% and 29% of GWP and non-renewable energy use, respectively. Except for acidification (26%) and smog potential impacts (35%), Module A2 Transportation is generally a minor contributor (<15%) to the overall potential environmental impacts of standard density SFRM production.

The cradle-to-gate manufacture of **medium density SFRM** embodies about 5.5 GJ of primary energy (LHV) and emits 493 kg CO<sub>2</sub> eq of greenhouse gases per ton of product. About 93% of the total primary energy input is derived from non-renewable primary energy resources. Across the three medium density production information modules, Module A1 extraction and upstream production contributes the largest share of the LCIA and energy indicator results – accounting for 82% (GWP-100), 72% (NRPRE) and over 50% of both acidification and smog formation burdens. Unlike standard density SFRM, Module A3 Manufacturing is a more minor contributor to the overall potential environmental impacts of medium density SFRM – accounting for 17% of NRPR<sub>E</sub> and 9% of GWP-100. Module A2 Transportation is a significant contributor to SFP (37%), AP (27%) and GWP (9%) to the overall potential environmental impacts of medium density SFRM manufacture.





The cradle-to-gate manufacture of **high and ultra-high density SFRM** embodies about 6.3 GJ of primary energy (LHV) and emits 621 kg CO<sub>2</sub> eq of greenhouse gases per ton of product. Almost 93% of the total primary energy input is derived from non-renewable primary energy resources. Across the three high and ultra-high density production information modules, Module A1 extraction and upstream production contributes the largest share of the key LCIA and energy indicator results – accounting for 80% (GWP-100), 67% (NRPRE) and 78% of eutrophication potential burden. Similar to medium density SFRM, Module A3 Manufacturing is a more minor contributor to the overall potential environmental impacts of high and ultra-high density SFRM – accounting for 15% of NRPRE and 13% of GWP-100. Module A2 Transportation is a significant contributor to SFP (53%), AP (39%) and GWP (9%) to the overall potential environmental impacts of high and ultra-high density SFRM manufacture.

## 7 ADDITIONAL ENVIRONMENTAL INFORMATION

Standard, medium and high & ultra-high density SFRMs use between 2% to 7% recovered materials (hammermilled newsprint and post-industrial polystyrene).

## 8 DECLARATION TYPE

GCPAT SFRM EPD is categorized as follows:

- A corporate specific product EPD, averaged across the manufacturer's plants.

This declaration presents a weighted average EPD for three SFRM North American facilities operated by GCPAT. Product activities covered include the raw material supply, transport and manufacturing (modules A1 to A3). The declaration is intended for Business-to-Business (B-to-B) communication.

## 9 DECLARATION COMPARABILITY LIMITATION STATEMENT

*- Only EPDs prepared from cradle-to-grave life cycle results and based on the same function, RSL, quantified by the same functional unit, and meeting all the conditions for comparability listed in ISO 14025:2006 and ISO 21930:2017 can be used to comparison between products.*



## 10 EPD EXPLANATORY MATERIAL

For any explanatory material, regarding this EPD please contact the program operator.

ASTM International

Environmental Product Declarations

100 Barr Harbor Drive,

West Conshohocken,

PA 19428-2959,

<http://www.astm.org>

## 11 REFERENCES

1. ISO 14025:2006 Environmental labeling and declarations - Type III environmental declarations - Principles and procedures.
2. ISO 21930:2017 Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products and services.
3. ISO 14040:2006/Amd 1:2020 Environmental management - Life cycle assessment - Principles and framework.
4. ISO 14044:2006/Amd1:2017/Amd2:2020 Environmental management - Life cycle assessment - Requirements and guidelines.
5. ASTM Program Operator Rules. Version: 8.0, Revised 04/29/20.
6. ISO 14021:2016 Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling).
7. PRé 2019. SimaPro LCA Software v9.2.0.2, 2021, <https://simapro.com/>
8. LEED v4, *Building Design and Construction Guide (BD+C), MR Credit: Building Product Disclosure and Optimization – Environmental Product Declarations, Option 2 Multi-attribute optimization* (1 point). <https://www.usgbc.org/node/2616376?return=/credits/new-construction/v4/material-%26amp%3B-resources>.
9. LEED v4.1, *Building Design and Construction Guide (BD+C), MR Credit: Building Product Disclosure and Optimization – Environmental Product Declarations, Option 2 Multi-attribute optimization* (1 point). <https://leeduser.buildinggreen.com/credit/NC-v4.1/MRC2#tab-credit-language>.
10. ACLCA 2019, *Guidance to Calculating Non-LCIA Inventory Metrics in Accordance with ISO 21930:2017*. The American Centre for Life Cycle Assessment. May 2019. <https://aclca.org/aclca-iso-21930-guidance/>
11. PCA 2021, EPD, Portland Cement- Industry-wide. <https://www.astm.org/products-services/certification/environmental-product-declarations/epd-pcr.html>
12. Athena 2021, *A Cradle-to-Gate Life Cycle Assessment of GCP Applied Technologies Standard, Medium and High & Ultra High-Density Spray-applied Fire-Resistive Materials (SFRMs), Final Report*.

ASTM International  
West Conshohocken, PA  
[www.astm.org](http://www.astm.org)

Date of issue: 04.15.2022  
Period of validity: 5 years  
Declaration #: EPD 060



2325 Lakeview Pkwy,  
Ste 450, Alpharetta, GA,  
30009 USA

[gcpat.com](http://gcpat.com)

**John Dalton**  
Technical Service Manager  
+1 617 498 4935 Office  
+1 781 258 6463 Mobile  
[John.a.dalton@gcpat.com](mailto:John.a.dalton@gcpat.com)

## Declare Label

# Declare.



---

## Monokote MK-6/HY GCP- Applied Technologies

**Final Assembly:** Multiple Global Locations

**Life Expectancy:** Life of Structure Year(s)

**End of Life Options:** Landfill (100%)

### Ingredients:

---

Sulfuric acid, calcium salt (1:1); Pulp, cellulose; Polystyrene;  
Calcium Carbonate; Quartz

**Living Building Challenge Criteria:** Compliant

---

### I-13 Red List:

- |   |                             |
|---|-----------------------------|
| <input checked="" type="checkbox"/> LBC Red List Free | % Disclosed: 100% at 100ppm |
| <input type="checkbox"/> LBC Red List Approved        | VOC Content: 0 g/L          |
| <input type="checkbox"/> Declared                     |                             |

**I-10 Interior Performance:** CDPH Standard Method v1.2-2017

**I-14 Responsible Sourcing:** Not Applicable

WRG-0001  
EXP. 01 MAR 2023  
Original Issue Date: 2017

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY  
INTERNATIONAL LIVING FUTURE INSTITUTE™ [living-future.org/declare](https://living-future.org/declare)



2325 Lakeview Pkwy,  
Ste 450, Alpharetta, GA,  
30009 USA

[gcpat.com](http://gcpat.com)

**John Dalton**  
Technical Service Manager  
+1 617 498 4935 Office  
+1 781 258 6463 Mobile  
[John.a.dalton@gcpat.com](mailto:John.a.dalton@gcpat.com)

## Volatile Organic Compounds (VOCs) Content Report



**VTEC Laboratories, Inc.**  
**212 Manida Street, Bronx, NY 10474**  
**Office: 718-542-8248 \*\*\* FAX: 718-542-8759**  
[Neil@VTECLABS.com](mailto:Neil@VTECLABS.com) // [jerry@vteclabs.com](mailto:jerry@vteclabs.com)

**JOB ID:** V100-4371/Rev.1 (included reference to ASTM D2369 w/ EPA-24) // Grace Construction Products

ATTN: John A. Dalton / Tech-Svc Engineer, 62 Whittemore Ave, Cambridge, MA 02140

TEL: 617-498-4935 // FAX: 617-498-4419 // E-Mail: [john.a.dalton@grace.com](mailto:john.a.dalton@grace.com)

**SAMPLE ID:** Three (3) Composite Coating Powders = Z146, MK6-HY and Z106-HY

**SCOPE:** Analyze per EPA Method 24 / ASTM D3960 for VOC Content

**SUBMISSION DATE:** 2-Jul-13

**REPORT DATE:** 3-Jul-13

**ANALYZED BY:** Dr. Jerry DeMenna, Director of Analytical Research

*Re-Issued: 26-Jul-13*

**PROCEDURES:**

Two (2) Standard Analytical Methods were followed to determine Volatile Organic Compounds (VOCs) in assorted Paints, Coatings & Aerosol Sprays

- (a) TOTAL Organic Solvents (VOCs) defined by ASTM D2369:2003 (equivalent to EPA Method 24) using Gravimetry: 10 gms weighed into a Tared Dish, dried @ 110°C for 6 hours & re-weighed to determine the Loss as VOC.
- (b) Volatile Organic Solvents defined by ASTM D3960 using GC-FID: 5.0 gms weighed into a 40ml VOC Vial, pressurized with Helium and heated to 110°C for 20 minutes then analyzed w/ a standard VOC / Head-Space GC program using FID for TOTAL VOC Content based on Total FID response.

**DATA Results:**

The results are for the Testing listed above, using EPA and ASTM protocols and NIST-Traceable Standards, where available, for calibration of the respective Instruments:

<b><u>SAMPLE TEST</u></b>	<b><u>ASTM D2369:2003 (EPA-24)</u></b> <b><u>Results</u></b>	<b><u>ASTM-D3960</u></b> <b><u>Results</u></b>
Z-146 / Inorganic Mineral Blend	< 0.5% (vol%)	< 0.01% (vol%)
MK-6 HY / Mineral-Polymer Blend	< 0.5% (vol%)	< 0.01% (vol%)
Z-106 HY / Mineral-Polymer Blend	< 0.5% (vol%)	< 0.01% (vol%)
<i>Method Detection Limit</i>	<i>0.5%</i>	<i>0.01%</i>

**Findings:**

This Data confirms there are no VOCs detected by both the EPA and the ASTM Standard Methods.

*Jerry DeMenna*

Dr. Jerry DeMenna, Ph.D. / Laboratory Mgr.

**DISCLAIMER:** This is a factual report of the results obtained from the Analytical Laboratory testing of the aforementioned products. These results may be considered in application to the specific products tested in this report, and should not be construed as representative of the composition of other, similar products from the manufacturer. This report shall not be considered a recommendation or disapprobation by VTEC Laboratories, Inc., of the materials tested. This report may be used for obtaining product acceptance and for general characterization of the materials, but shall not be used in any advertising situations. VTEC Laboratories, Inc. shall not be liable for any loss or damages resulting from the use of the data in this report.

**NOTICE:** VTEC Laboratories, Inc. shall not be liable for any loss or damages resulting from the use of the data in this report; in excess of the invoice. The information in this report pertains to this sample(s) only. This report shall not be interpreted to be any form of warranty, either expressed or implied, as to the suitability or fitness of said sample(s) for such uses and/or applications, as the party contracting for the report may apply to such sample(s).

# Volatile Organic Compounds (VOCs) Emissions Report



INDOOR AIR QUALITY EVALUATION FOLLOWING THE REQUIREMENTS OF CDPH/EHLB/STANDARD METHOD	
<b>Product Description</b>	Z MK-6/GF, MK-6/HY, MK-10/HB, MK-6/HY Extended Set, Z-3306/G, Retroguard RG
<b>Customer Information</b>	GCP APPLIED TECHNOLOGIES JOHN DALTON CONCRETE OPERATING UNIT, 62 WHITTEMORE AVE CAMBRIDGE MA 02140
<b>Testing Laboratory</b>	2211 Newmarket Parkway, Suite 106, Marietta, GA 30067-9399 USA
<b>Product Category</b>	Surfacing Materials
<b>Product Sub-Category</b>	Surfacing (Thin) - Ceiling Usage
<b>Date Received</b>	February 7, 2017
<b>Test Description</b>	The product was received by UL Environment as packaged and shipped by the customer. The package was visually inspected and stored in a controlled environment immediately following sample check-in. Just prior to loading, the product was unpackaged, cut, and sealed to expose the top surface only. The sample was placed inside the environmental chamber, and tested according to the specified protocol.
<b>Test Date</b>	3/6/2017 - 3/20/2017
<b>Product Area Exposed</b>	one-sided area = 0.0361 m <sup>2</sup>
<b>Chamber Volume</b>	0.0868 m <sup>3</sup>
<b>Product Loading Ratio</b>	0.42 m <sup>2</sup> /m <sup>3</sup>
<b>Test Chamber Conditions</b>	Air change rate: 1.00 ± 0.05 1/h Inlet air flow rate: 0.0868 ± 0.004 m <sup>3</sup> /h Temperature: 21.0°C - 22.5°C* Relative Humidity: 50% RH ± 5%
<b>Test Method</b>	CDPH - CA Section 01350 <i>Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources using Environmental Chambers</i> Version 1.2.
<b>Released by</b>	<i>Allyson McFry</i> Allyson M. McFry Chemistry Laboratory Director
<p>*The temperature range specification is 23°C ± 1°. The actual temperature range listed above may vary slightly. If the range is outside this specification, data was reviewed to ensure a negative impact did not occur.</p> <p>This test is accredited and meets the requirements of ISO/IEC 17025 as verified by ANSI National Accreditation Board. Refer to certificate and scope of accreditation AT-1297.</p>	

### PHOTOGRAPH OF SAMPLE





## RESULTS SUMMARY

Product Description		Z MK-6/GF, MK-6/HY, MK-10/HB, MK-6/HY EXTENDED SET, Z-3306/G, RETROGUARD RG			
Environment	Product Usage	Product Surface Area	Room Volume	Ventilation Rate (ACH)	Product Compliance?
Classroom	Floor	89.2 m <sup>2</sup>	231 m <sup>3</sup>	0.82	Yes
Office	Floor	11.1 m <sup>2</sup>	30.6 m <sup>3</sup>	0.68	Yes

## PROJECT DESCRIPTION

The product was monitored for emissions of TVOC, individual VOCs, formaldehyde and other aldehydes over the 96-hour test period. Measurements were made and predicted exposures were calculated according to the CA Section 01350 protocol. As specified in this protocol, the results at 96 hours, after 10 days of conditioning, were compared to ½ (one-half) the current Chronic Reference Exposure Levels (CRELs), as adopted from the California OEHHA list. All identified VOCs were also compared to the California-EPA OEHHA Proposition 65 list and the California-EPA Air Resource Board list of Toxic Air Contaminants (TACs).

### Report Outline:

Table 1	<a href="#">Comparison of Data To Method Requirements</a>
Table 2	<a href="#">Chamber Concentrations and Emission Factors</a>
Table 3	<a href="#">Most Abundant Compounds</a>
Table 4	<a href="#">VOC Predicted Air Concentrations And Regulatory Information</a>
Chain of Custody	<a href="#">Chain of Custody</a>

For UL Environment's technical references and resources [click here](#) or <https://industries.ul.com/wp-content/uploads/sites/2/2018/02/Technical-references-and-resources.pdf>

For Product Evaluation Methodologies information [click here](#) or <https://industries.ul.com/wp-content/uploads/sites/2/2018/03/ProductEvaluationMethodologies-PE.pdf>

For Quality Control Program or Environmental Chamber Evaluations information [click here](#) or <https://industries.ul.com/wp-content/uploads/sites/2/2018/02/Quality-Control-Procedures.pdf>

For RSD, Quality Assurance Report or other quality documents, [Request](#) here or contact ULE.

**TABLE 1**

Product Description		Z MK-6/GF, MK-6/HY, MK-10/HB, MK-6/HY EXTENDED SET, Z-3306/G, RETROGUARD RG					
COMPARISON OF DATA TO METHOD REQUIREMENTS AT 96 HOURS FOLLOWING 10 DAYS OF CONDITIONING							
Compound	CAS Number	½ CREL (µg/m³)	Chamber Concentration (µg/m³)	Emission Factor <sup>††</sup> (µg/m²•hr)	Classroom Predicted Concentration (µg/m³) <sup>**</sup>	Office Predicted Concentration (µg/m³) <sup>**</sup>	Meets ½ CREL? (Classroom/Office)
Acetaldehyde	75-07-0	70	BQL	BQL	BQL	BQL	Yes
Benzene	71-43-2	1.5	BQL	BQL	BQL	BQL	Yes
Carbon disulfide*	75-15-0	400	BQL	BQL	BQL	BQL	Yes
Carbon tetrachloride*	56-23-5	20	BQL	BQL	BQL	BQL	Yes
Chlorobenzene	108-90-7	500	BQL	BQL	BQL	BQL	Yes
Chloroform*	67-66-3	150	BQL	BQL	BQL	BQL	Yes
Dichlorobenzene (1,4-)	106-46-7	400	BQL	BQL	BQL	BQL	Yes
Dichloroethylene (1,1)*	75-35-4	35	BQL	BQL	BQL	BQL	Yes
Dimethylformamide (N,N-)*	68-12-2	40	BQL	BQL	BQL	BQL	Yes
Dioxane (1,4-)	123-91-1	1,500	BQL	BQL	BQL	BQL	Yes
Epichlorohydrin	106-89-8	1.5	BQL	BQL	BQL	BQL	Yes
Ethylbenzene	100-41-4	1,000	BQL	BQL	BQL	BQL	Yes
Ethylene glycol	107-21-1	200	BQL	BQL	BQL	BQL	Yes
Ethylene glycol monoethyl ether acetate*	111-15-9	150	BQL	BQL	BQL	BQL	Yes
Ethylene glycol monoethyl ether*	110-80-5	35	BQL	BQL	BQL	BQL	Yes
Ethylene glycol monomethyl ether acetate*	110-49-6	45	BQL	BQL	BQL	BQL	Yes
Ethylene glycol monomethyl ether*	109-86-4	30	BQL	BQL	BQL	BQL	Yes
Formaldehyde	50-00-0	9.0***	BQL	BQL	BQL	BQL	Yes

Product Description		Z MK-6/GF, MK-6/HY, MK-10/HB, MK-6/HY EXTENDED SET, Z-3306/G, RETROGUARD RG					
COMPARISON OF DATA TO METHOD REQUIREMENTS AT 96 HOURS FOLLOWING 10 DAYS OF CONDITIONING							
Compound	CAS Number	½ CREL (µg/m³)	Chamber Concentration (µg/m³)	Emission Factor <sup>††</sup> (µg/m²·hr)	Classroom Predicted Concentration (µg/m³) <sup>**</sup>	Office Predicted Concentration (µg/m³) <sup>**</sup>	Meets ½ CREL? (Classroom/Office)
Hexane (n-)	110-54-3	3,500	BQL	BQL	BQL	BQL	Yes
Isophorone*	78-59-1	1,000	BQL	BQL	BQL	BQL	Yes
Isopropanol	67-63-0	3,500	BQL	BQL	BQL	BQL	Yes
Methyl chloroform*	71-55-6	500	BQL	BQL	BQL	BQL	Yes
Methyl t-butyl ether	1634-04-4	4,000	BQL	BQL	BQL	BQL	Yes
Methylene chloride*	75-09-2	200	BQL	BQL	BQL	BQL	Yes
Naphthalene	91-20-3	4.5	BQL	BQL	BQL	BQL	Yes
Phenol	108-95-2	100	BQL	BQL	BQL	BQL	Yes
Propylene glycol monomethyl ether*	107-98-2	3,500	BQL	BQL	BQL	BQL	Yes
Styrene	100-42-5	450	BQL	BQL	BQL	BQL	Yes
Tetrachloroethylene (perchloroethylene)	127-18-4	17.5	BQL	BQL	BQL	BQL	Yes
Toluene	108-88-3	150	BQL	BQL	BQL	BQL	Yes
Trichloroethylene	79-01-6	300	BQL	BQL	BQL	BQL	Yes
Vinyl acetate	108-05-4	100	BQL	BQL	BQL	BQL	Yes
Xylenes (m-, o-, p-)	1330-20-7	350	BQL	BQL	BQL	BQL	Yes

BQL denotes below quantifiable level of 0.04 µg for individual VOCs, with the exceptions benzene and epichlorohydrin which have a QL of 0.02 µg, based on a standard 18 L air collection volume.

<sup>††</sup>The emission factor (EF) is calculated from the chamber concentration (CC), the chamber air change rate (N<sub>C</sub>), the chamber volume (V<sub>C</sub>), and the product area exposed in the chamber (A<sub>C</sub>) as:  $EF = (CC \cdot V_C \cdot N_C) / A_C$ .

<sup>\*\*</sup>The predicted building exposure concentration (BC) is calculated from the emission factor (EF), the building air change rate (N<sub>B</sub>), the building room volume (V<sub>B</sub>), and the product area exposed in the building room (A<sub>B</sub>) as:  $BC = (EF \cdot A_B) / (V_B \cdot N_B)$ . For more information on Predicted Concentration modeling parameters, [click here](#).

<sup>\*\*\*</sup>Guidance value per CA Standard Method

**TABLE 2**

Product Description		Z MK-6/GF, MK-6/HY, MK-10/HB, MK-6/HY EXTENDED SET, Z-3306/G, RETROGUARD RG	
CHAMBER CONCENTRATIONS AND EMISSION FACTORS FOR TVOC AND FORMALDEHYDE AT 24, 48, AND 96 HOURS FOLLOWING 10 DAYS OF CONDITIONING			
Elapsed Exposure Hour After 10 Days Conditioning	Chamber Concentration (µg/m³)	Emission Factor <sup>††</sup> (µg/m²•hr)	
<b>TVOC<sup>†</sup></b>			
24	2.3	5.5	
48	BQL	BQL	
96	BQL	BQL	
<b>Formaldehyde<sup>‡</sup></b>			
24	2.0	4.8	
48	BQL	BQL	
96	BQL	BQL	

BQL denotes below quantifiable level of 2 µg/m³.

Exposure hours are nominal (± 1 hour).

<sup>†</sup>Defined as the sum of those VOCs that elute between the retention times of n-hexane (C<sub>6</sub>) and n-hexadecane (C<sub>16</sub>) on a non-polar capillary GC column quantified based on a toluene response factor.

<sup>‡</sup> Compound identified and quantified by DNPH derivitization and HPLC/UV analysis.

<sup>††</sup>The emission factor (EF) is calculated from the chamber concentration (CC), the chamber air change rate (N<sub>c</sub>), the chamber volume (V<sub>c</sub>), and the product area exposed in the chamber (A<sub>c</sub>) as:  $EF = (CC \cdot V_c \cdot N_c) / A_c$ .

**TABLE 3**

Product Description		Z MK-6/GF, MK-6/HY, MK-10/HB, MK-6/HY EXTENDED SET, Z-3306/G, RETROGUARD RG			
TEN MOST ABUNDANT IDENTIFIED INDIVIDUAL VOLATILE ORGANIC COMPOUNDS (VOCs) AND/OR ALDEHYDES AT 96 HOURS FOLLOWING 10 DAYS OF CONDITIONING					
CAS Number	Compound	Chamber Concentration (µg/m <sup>3</sup> )	Emission Factor <sup>††</sup> (µg/m <sup>2</sup> •hr)	Calculated Predicted Exposure Concentration <sup>**</sup> (µg/m <sup>3</sup> )	
				Classroom	Office
---	TVOC <sup>‡‡</sup>	BQL	BQL	---	---
100-52-7	Benzaldehyde <sup>‡</sup>	2.0	4.8	2.3	2.6

Exposure hours are nominal (± 1 hour).

VOC data obtained by scanning GC/MS; identification of compound made by retention time and mass spectral characteristics.

<sup>†</sup>Quantified using multipoint authentic standard curve. Other VOCs quantified relative to toluene.

<sup>\*</sup>Identification based on NIST mass spectral database only.

<sup>‡</sup>Compound identified and quantified by DNPH derivitization and HPLC/UV analysis.

<sup>††</sup>The emission factor (EF) is calculated from the chamber concentration (CC), the chamber air change rate (N<sub>c</sub>), the chamber volume (V<sub>c</sub>), and the product area exposed in the chamber (A<sub>c</sub>) as:  $EF = (CC \cdot V_c \cdot N_c) / A_c$ .

<sup>‡‡</sup>Defined as the sum of those VOCs that elute between the retention times of n-hexane (C<sub>6</sub>) and n-hexadecane (C<sub>16</sub>) on a non-polar capillary GC column quantified based on a toluene response factor.

<sup>\*\*</sup>The predicted building exposure concentration (BC) is calculated from the emission factor (EF), the building air change rate (N<sub>B</sub>), the building room volume (V<sub>B</sub>), and the product area exposed in the building room (A<sub>B</sub>) as:  $BC = (EF \cdot A_B) / (V_B \cdot N_B)$ . For more information on Predicted Concentration modeling parameters, [click here](#).

**TABLE 4**

Product Description		Z MK-6/GF, MK-6/HY, MK-10/HB, MK-6/HY EXTENDED SET, Z-3306/G, RETROGUARD RG						
VOC PREDICTED AIR CONCENTRATIONS AND REGULATORY INFORMATION AT 96 HOURS FOLLOWING 10 DAYS OF CONDITIONING								
CAS Number	Compound	Chamber Concentration (µg/m³)	Emission Factor <sup>††</sup> (µg/m²•hr)	Predicted Exposure Concentration <sup>**</sup> (µg/m³)		✓ Indicates Presence On List		
				Classroom	Office	CA PROP 65	CA AIR TOXIC	CREL
---	none	---	---	---	---	---	---	---

<sup>†</sup>Quantified using multipoint authentic standard curve. Other VOCs quantified relative to toluene.

<sup>‡</sup>Compound identified and quantified by DNPH derivitization and HPLC/UV analysis.

<sup>††</sup>The emission factor (EF) is calculated from the chamber concentration (CC), the chamber air change rate (N<sub>c</sub>), the chamber volume (V<sub>c</sub>), and the product area exposed in the chamber (A<sub>c</sub>) as:  $EF = (CC \cdot V_c \cdot N_c) / A_c$ .

<sup>\*\*</sup>The predicted building exposure concentration (BC) is calculated from the emission factor (EF), the building air change rate (N<sub>B</sub>), the building room volume (V<sub>B</sub>), and the product area exposed in the building room (A<sub>B</sub>) as:  $BC = (EF \cdot A_B) / (V_B \cdot N_B)$ . For more information on Predicted Concentration modeling parameters, [click here](#).

CAL Prop. 65: California Health and Welfare Agency, Proposition 65 Chemicals

1 = known to cause cancer

2 = known to cause reproductive toxicity

CAL Toxic Air Contaminant:

I) Substances identified as Toxic Air Contaminants, known to be emitted in California, with a full set of health values reviewed by the Scientific Review Panel.

IIA) Substances identified as Toxic Air Contaminants, known to be emitted in California, with one or more health values under development by the Office of Environmental Health Hazard Assessment for review by the Scientific Review Panel.

IIB) Substances NOT identified as Toxic Air Contaminants, known to be emitted in California, with one or more health values under development by the Office of Environmental Health Hazard Assessment for review by the Scientific Review Panel.

III) Substances known to be emitted in California, and are NOMINATED for development of health values or additional health values.

IVA) Substance identified as Toxic Air Contaminants, known to be emitted in California, and are TO BE EVALUATED for entry into Category III.

IVB) Substance NOT identified as Toxic Air Contaminants, known to be emitted in California, and are TO BE EVALUATED for entry into Category III.

V) Substance identified as Toxic Air Contaminants, and NOT KNOWN TO BE EMITTED from stationary source facilities in California based on information from the AB 2588 Air Toxic "Hot Spots" Program and the California Toxic Release Inventory.

VI) Substances identified as Toxic Air Contaminants, NOT KNOWN TO BE EMITTED from stationary source facilities in California, and are active ingredients in pesticides in California.

Chronic REL: California Office of Environmental Health Hazard Assessment (OEHHA), Chronic Reference Exposure Levels

✓ = Found in Listing

<b>Product Description</b>	Z MK-6/GF, MK-6/HY, MK-10/HB, MK-6/HY EXTENDED SET, Z-3306/G, RETROGUARD RG
<b>CHAIN OF CUSTODY</b>	



UL Environment Chain of Custody

1000 21719

11557670 1.1

FOR INTERNAL USE ONLY		Test Information	
 CURBCH067	Proposal #	<input type="checkbox"/> Specialized Test for Odors	<input type="checkbox"/> Formaldehyde Only <input type="checkbox"/> 4 Hr <input type="checkbox"/> 24 Hr
	<input type="checkbox"/> RUSH (Confirm with Account Manager prior to submitting product)	<input checked="" type="checkbox"/> CA 01350 CDPH/EHLB/Standard Method V1.1	<input type="checkbox"/> Office <input type="checkbox"/> Classroom <input type="checkbox"/> Residential
Project - Product <b>18538-0101h</b>	<input type="checkbox"/> 24 Hr TVOC <input type="checkbox"/> with Formaldehyde	<input type="checkbox"/> ANSI/BIFMA M7.1 / X7.1	<input type="checkbox"/> Small Chamber <input type="checkbox"/> Intermediate Chamber <input type="checkbox"/> Large Chamber
Category <b>Surface Coatings Materials</b>	<input type="checkbox"/> 24 Hr TVOC & IVOCs <input type="checkbox"/> with Formaldehyde	<input type="checkbox"/> Other (Specify test method, non-standard sample preparation, modeling parameters, application rate for wet products, etc.):	
Subcategory <b>Surface Coatings (Thin) Ceiling US/CA</b>	GREENGUARD Screening Test (24 Hr TVOC, IVOCs, and Aldehydes w/modeling)		
Manufacturer and Contact Details			
Company Name	<b>GCP - Applied Tech</b>	Contact Name	<b>John Dalton</b>
Street Address	<b>62 Whittemore Ave</b>	Title	
City, State/Province, Zip/Postal Code	<b>Cambridge, MA 02140</b>	Phone Number	<b>617-498-4935</b>
Country	<b>U.S.A.</b>	E-Mail Address	<b>john.a.dalton@gcpat.com</b>
Product Details			
Sample ID (Used in Report)	<b>MK-6/HY</b>	Product Collection Location	
Product Commercial Name	<b>↓</b>	Product Collection Date/Time (mm/dd/yyyy/hh:mm)	
Manufacturer's Identification Number		Product Collected By	
Manufactured Date (mm/dd/yyyy)		Number of Product Pieces	
Post-Testing Instructions			
<input type="checkbox"/> Return Product (Return Shipper and Manufacturer's Shipping Account # must be provided for product return)		<input type="checkbox"/> Discard product after testing	
Return Shipper		Manufacturer's Shipping Acct #	
Packed By		Carrier	<b>Fed-Ex</b>
Ship Date (mm/dd/yyyy)	<b>2/6/17</b>	Air Bill #	<b>7783 6136 1522</b>
Signature/Tracking Details			
Relinquished By (Manufacturer)		Date & Time (mm/dd/yyyy/hh:mm)	
Signature			
Laboratory Receiving Details - FOR INTERNAL USE ONLY			
Received by (Laboratory)	<b>John Dalton</b>	Date & Time (mm/dd/yyyy/hh:mm)	<b>2/7/17 12:00 PM</b>
Signature			
Types of Containers	<b>RACH</b>	Shipping Package Notes	
Condition of Shipping Package	<input checked="" type="checkbox"/> Undamaged <input type="checkbox"/> Damaged	Product Condition Notes	
Condition of Product	<input checked="" type="checkbox"/> Acceptable <input type="checkbox"/> Unacceptable		

White - Project File  
Canary - Sample  
Pink - Customer Retains

SHIP TO:  
UL Environment  
2211 Newmarket Parkway, #106, Marietta, Georgia 30067  
T: 888.485.4733 F: 770.980.0072

00-EN-F0652



## VOC EMISSION RESULTS COMPARISON TO STANDARD

Standard referenced: CDPH/EHLB/Standard Method V1.2 (January 2017) "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers" (aka CA Section 01350).

### PRODUCT SAMPLE INFORMATION

<b>Manufacturer</b>	GCP Applied Technologies
<b>Product Description</b>	Z MK-6/GF, MK-6/HY, MK-10/HB, MK-6/HY EXTENDED SET, Z-3306/G, RETROGUARD RG
<b>Product Type</b>	Surfacing Materials
<b>Sample Identification</b>	UL Environment's 18538-010AA
<b>Manufactured Date</b>	Not Provided
<b>Test Completed Date</b>	3/20/2017
<b>UL Environment Report #</b>	18538-01R4
<b>Report Date</b>	June 6, 2019

### TEST RESULTS COMPARISON TO STANDARD CRITERIA

Environment	Classroom		Office	
<b>Surface Area</b>	89.2 m <sup>2</sup>		11.1 m <sup>2</sup>	
	<b>Criterion</b>	<b>Meets?</b>	<b>Criterion</b>	<b>Meets?</b>
<b>Individual VOC</b>	≤ ½ CREL	Yes	≤ ½ CREL	Yes
<b>Formaldehyde</b>	≤ 9.0 µg/m <sup>3</sup>	Yes	≤ 9.0 µg/m <sup>3</sup>	Yes

Environment	Classroom	Office
<b>Surface Area</b>	89.2 m <sup>2</sup>	11.1 m <sup>2</sup>
<b>TVOC</b>	0.5 mg/m <sup>3</sup> or less	0.5 mg/m <sup>3</sup> or less

TVOC comparison is based on LEED BD+C: New Construction v4 (LEED v4), Indoor environmental quality (EQ) category/Low-emitting materials credit/Emissions and content requirements/General emissions evaluation.

<http://www.usgbc.org/node/2614095?return=/credits/new-construction/v4/indoor-environmental-quality>

<b>Reviewed By</b>	 Allyson McFry Chemistry Laboratory Manager
--------------------	--

Complete testing and data results are presented in UL Environment Report

**Disclaimer:** This Comparison affirms that: 1) the product sample was tested according to the referenced standard; 2) the measured VOC emissions were evaluated for the defined exposure scenario(s); and 3) if so indicated above that the results meet the criteria of the referenced standard(s). UL Environment did not select the samples, determine if the samples were representative of production samples, witness the production of test samples, or were we provided with information relative to the formulation or identification of component materials used in the test samples. The test results apply only to the actual samples tested. The issuance of this Comparison in no way implies Listing, Classification or Recognition by UL and does not authorize the use of UL Listing, Classification or Recognition Marks or any other reference to UL on the product or system. UL Environment authorizes the above named company to reproduce this Comparison provided it is reproduced in its entirety. The name, brand or marks of UL cannot be used in any packaging, advertising, promotion or marketing relating to the data in this Comparison, without UL's prior written permission. UL, its subsidiaries, employees and agents shall not be responsible to anyone for the use or nonuse of the information contained in this Comparison, and shall not incur any obligation or liability for damages, including consequential damages, arising out of or in connection with the use of, or inability to use, the information contained in this Comparison.